

CONSEAL™SOLVING CONCRETE
SEALING PROBLEMS.

SEAL OF SECURITY



BOND OF TRUST™

CS-55WATER—BASED
CONCRETE COATING**APPLICATIONS**

- Water and Polymer Based coating for concrete structures
 - Septic Tanks • Burial Vaults • Utility Vaults • Fish Hatcheries

SPECIAL
BURIAL VAULT COLORS

GOLD
SILVER
COPPER
BRONZE

PHYSICAL PROPERTIES

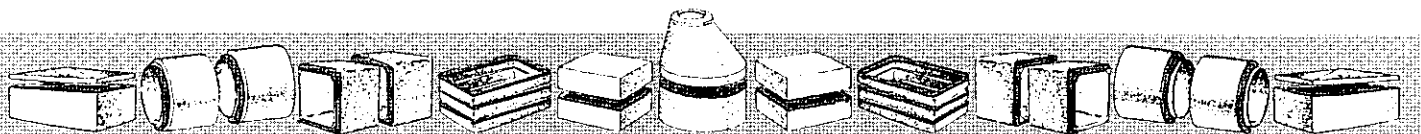
- Color: Black (standard). Also, available in clear, blue, white, green and orange. Custom colors available upon request.
- Coverage Per Gallon: 300-350 square feet for wet cast concrete
- CS-55 Concrete Coating creates a hard, smooth polymer film that protects the concrete from water intrusion and chemical attack.
- CS-55 is an odorless coating manufactured with non-toxic, environmentally safe ingredients. CS-55, also, has extremely low VOC content.
- Application Temperature Range: 40°F to 120°F (4° C to 48°C)
- Drying Time: 72°F (22°C): 5 to 10 minutes
40°F (4°C): 15 to 20 minutes
- CS-55 Concrete Coating comes packaged in recyclable plastic pails and fiber drums.
- Chemical Resistance: No visible deterioration when tested against 5% Caustic Potash, 5% Hydrochloric Acid, 5% Sulphuric Acid and 5% Hydrogen Sulfide. One year immersion tests.

LIMITED WARRANTY

This information is presented in good faith, but we cannot anticipate all conditions under which this information and our products, or the products of other manufacturers in combination with our products, may be used. We accept no responsibility for results obtained by the application of this information or the safety and suitability of our products, either alone or in combination with other products. Users are advised to make their own tests to determine the safety and suitability of each such product or product combinations for their own purposes. It is the users' responsibility to satisfy himself as to the suitability and completeness of such information for this own particular use. We sell this product without warranty, and buyers and users assume all responsibility and liability for loss or damage arising from the handling and use of this product, whether used alone or in combination with other products.



Active members of the Adhesive and Sealant Council

**CONCRETE SEALANTS** INC.8917 S. Palmer Road, P.O. Box 176, New Carlisle, Ohio 45344
(513) 845-8776 • FAX (513) 845-3587 • (800) 332-7325